
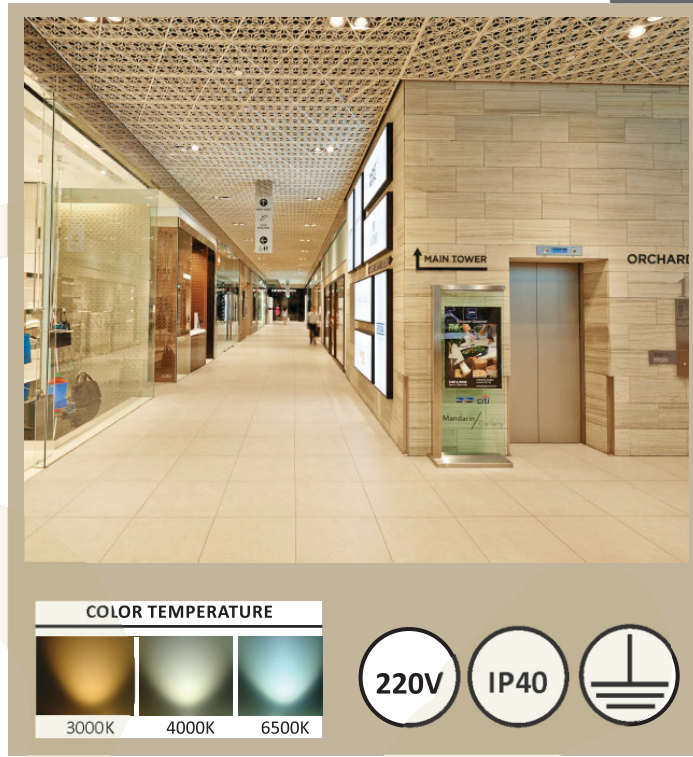


CARO

A design statement eminently suited to enhance architectural, retail and commercial environments.

- The system allows a multitude of possibilities for accent and display lighting by aiming and tilting the spot light and possibilities to combine different light distribution with one frame.
- The turn and twistable spot light can also be used as conventional down light
- Recessed frames containing one and two spot lights.
- Various geometric permutations possible.

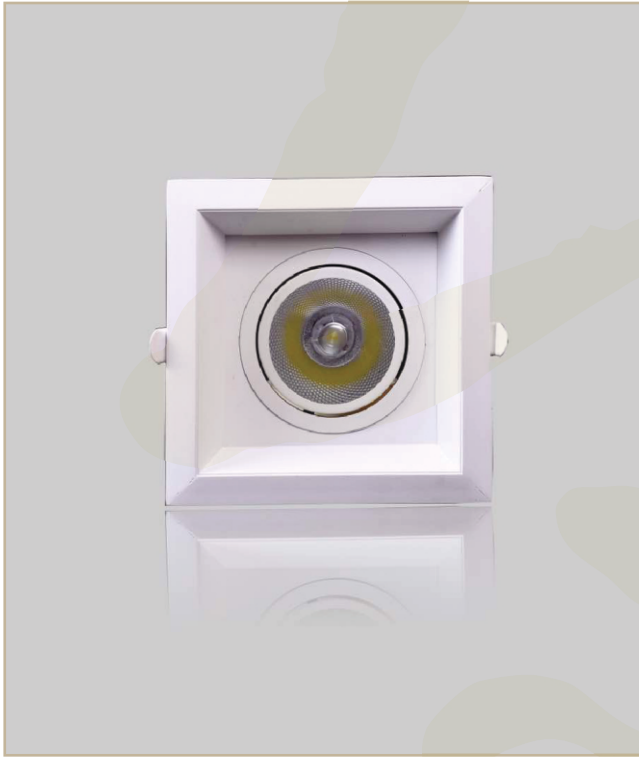

INDOOR LIGHTING

RECESS DOWNLIGHT

COLOR TEMPERATURE


3000K 4000K 6500K

220V IP40

Housing: Caro housing is made of pressure diecast aluminium with integral heat sink, bezel matt finish for Ceiling. Suitable for recessed mounted on a variety of fall ceilings systems. Mounting through self mounting spring loaded clip attached to the fixture.

Optical: High efficient LED Module in COB Technology with Constant Current driver. Fitting is with good colour rendering Ra>80.

Electrical: Recessed LED downlighter suitable for 30W with PF>.95 & driver efficiency of >85%. Input power is 90-240VAC, 50Hz.

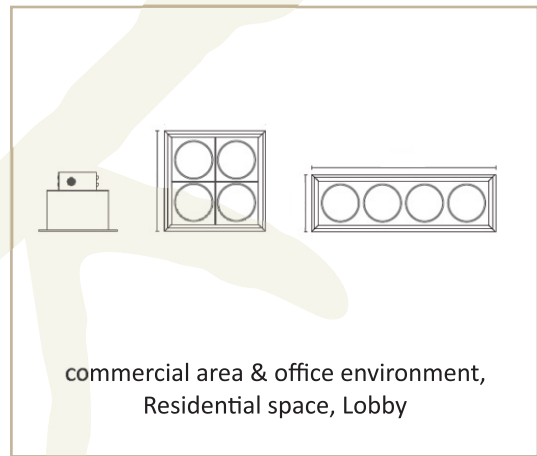

Product Name	Catalogue Reference No	Dimensions	Cut out size	Lamp wattage	Lumen output
CARO	VAK-DL-CAR-R-30	175X175X155	135X135	30W	2700
	VAK-DL-CAR-R-2x30	-	-	60W	5400