

# CORONA


Make a strong statement of style with a perfect harmony of glass and light

- Modular Light Compartment with enhanced energy efficiency.
- Uniform Lighting.
- LED lighting technology provides high lighting performance with long life span
- Environmentally friendly and maintenance free.
- Choice of colour temperatures
- Choice of body color



INDOOR LIGHTING

SURFACE DOWNLIGHT

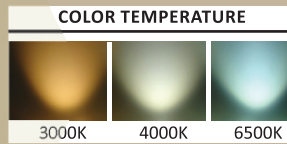

### Housing


Corona housing of Die cast aluminum. Proper integral heat sink, bezel matt white finish for ceiling.

### Optical:

Good colour rendering LED downlight, , choice of CCT 2700K-6500K at Ra>80, Difused light is produced with PMMA. LED is of COB type , Low power in different wattages.

### Electrical:

Corona is suitable for 10W,20W &30W with PF>.95 & driver efficiency of > 85%.Input power is 90-240VAC, 50Hz and beam angle of 15°, 25° & 40°.

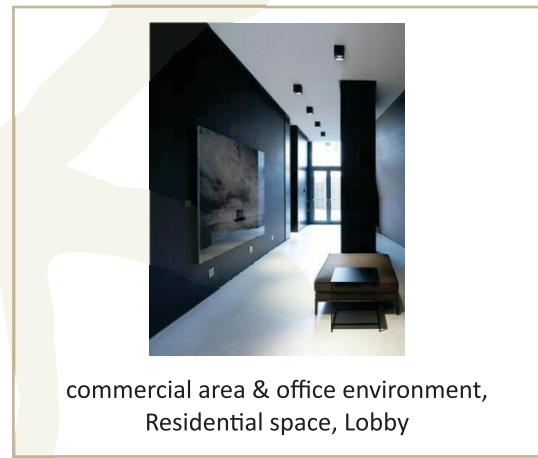

commercial area & office environment,  
Residential space, Lobby

Product Name	Catlogue Reference No	Dimensions (axb)	Lamp wattage	Lumen output
CORONA	VAK - DL -COR- SQ-S10	100 X 100	10W	900
	VAK - DL -COR- SQ-S20	100 X 150	20W	1800
	VAK - DL -COR- SQ-S30	100 X 190	30W	2700