

EYECON

The softly contoured aluminium reflector and energy efficient light source combine to produce a luminaire of exceptional style and performance.



- Shining Brightness bring you with comfort and visual enjoyment
- Uniform and directional Lighting.
- Easy installation and maintenance
- Emitting angle 15 degree



INDOOR LIGHTING



RECESS DOWN LIGHT

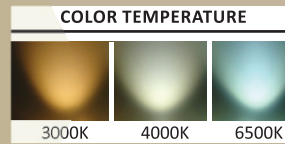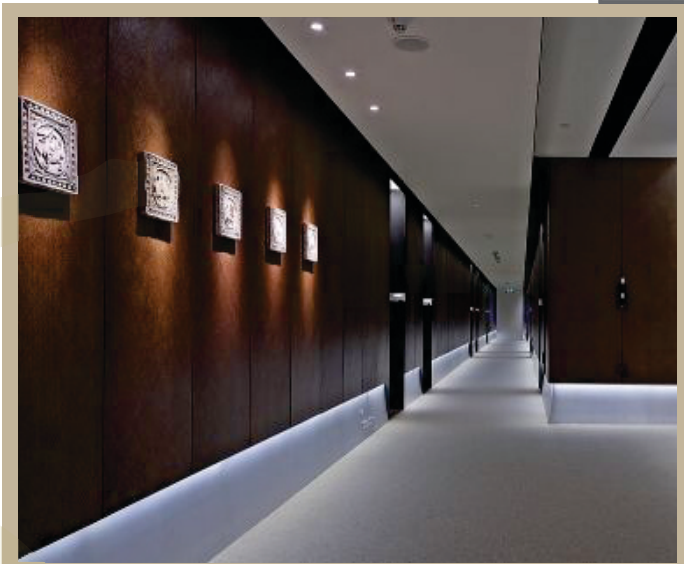

Housing: Eyecon Housing is made of pressure diecast aluminium with integral heat sink, bezel matt finish for Ceiling. Suitable for recessed mounted on a variety of fall ceilings systems. Mounting through self mounting spring loaded clip attached to the fixture

Optical: High efficient LED Module in COB Technology with Constant Current driver. Fitting is with good colour rendering Ra>80.

Electrical: Recessed LED downlighter suitable for 5W, 10W & 15W with PF>.95 & driver efficiency of > 85%. Input power is 90-240VAC, 50Hz.



commercial area & office environment,
Residential space, Lobby

Product Name	Catalogue Reference No	Dimensions	Cut out size	Lamp wattage	Lumen output
EYECON	VAK-DL-EYE-RD-R-5	90X50	80	5W	380
	VAK-DL-EYE-RD-R-10	90X60	80	10W	740
	VAK-DL-EYE-RD-R-15	90X80	80	15W	1110