

LOTUS

Sober and simple lighting for pedestrian area

- PMMA Diffuser with low angle prisms eradicates glare
- Aesthetic design for Creating ambience
- Numerous symmetrical light distributions
- Sealed to IP66 protection
- Innovative high performance optical system



Housing: Lotus body is made up with corrosion resistant die cast Aluminum, Stainless steel screws. Rubber gaskets are provided at appropriate location for dust and water protection

Optical: Lighting system with excellent downward symmetrical light distribution and visual appeal. The exactitude optical system gives very low glare rating, while reducing light pollution

Electrical: Fitting is wired with high efficient LED Module having long service life of 50000hrs. Assembled on MCPCB and mounted onto heat Conductive material. High quality constant current LED driver

Finishing: Complete fitting is pure polyester based powder coated with high corrosion resistant and chemically chromatised protection. Also available with multiple coats of weather resistant polyurethane paint in various color.




OUTDOOR LIGHTING

BOLLARD

COLOR TEMPERATURE

3000K 4000K 6500K

220V IP66

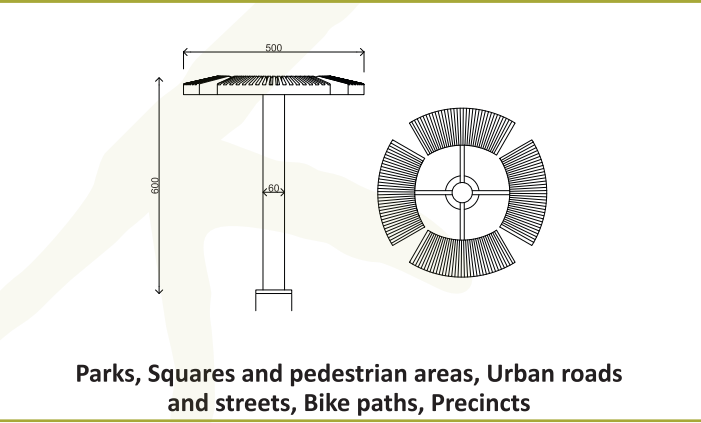

Product Name	Catalogue Ref. No.	LED Wattage	Lumen Output	Ingress Protection
LOTUS	VAK- BL-LOT-S-20	20W	1600 LM	IP 66