

SAMBA

Feature rich installation, surface lighting systems, premium performance and construction durability

- Modular Light Compartment with enhanced energy efficiency.
- Uniform Lighting.
- LED lighting technology provides high lighting performance with long life span
- Environmentally friendly and maintenance free.
- Choice of colour temperatures
- Choice of body color



INDOOR LIGHTING


SURFACE DOWNLIGHT

Housing: Samba housing of Die cast aluminum. Proper integral heat sink, bezel matt white nish for ceiling.

Optical: High efficient LED Module in COB Technology with Constant Current driver. Fitting is with good colour rendering Ra>80.

Electrical: Samba is suitable for ,12W, 25W and 30W with PF>.95 & driver of efficiency > 85%.Input power is 90-240VAC, 50Hz. and beam angle of 15°, 25°& 40°.

Finishing: Complete fitting is pure polyester based powder coated with high corrosion resistant and chemically chromotised protection. Also available in various color.

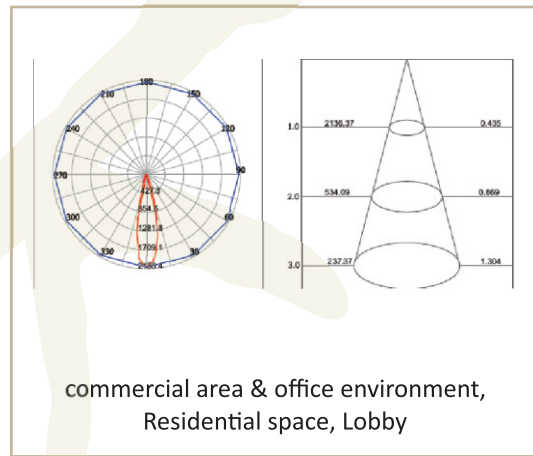

Product Name	Catlogue Reference No	Dimensions (axb)	Lamp wattage	Lumen output
SAMBA	VAK-DL- SAM-S-RD-S12	75 X 155	12W	1080
	VAK-DL- SAM-S-RD-S25	117 X 165	25W	2250
	VAK-DL- SAM-S-RD-S30	117 X 200	30W	2700