

TENNY

Small recessed downlight with die-cast aluminum body, excellent heatsink capability to minimize luminous degradation.

- Fix recess mounted square and round LED downlight
- Uniform and directional Lighting.
- Easy installation and maintenance
- Environmental friendly and maintenance free.
- Choice of color temperatures



INDOOR LIGHTING

RECESS DOWNLIGHT

COLOR TEMPERATURE

3000K

4000K

6500K


220V

IP40

Housing: Teeny Housing of pressure diecast aluminium with integral heat sink, bezel matt white finish for Ceiling. Suitable for recessed mounted on a variety of fall ceilings systems. Mounting through self mounting spring loaded clip attached to the fixture.

Optical: High efficient LED Module in COB Technology with Constant Current driver. Fitting is with good colour rendering Ra>80..

Electrical: Recessed LED downlighter suitable for varied wattages with PF>.95 & driver efficiency of > 85%. Input power is 90-240VAC, 50Hz.

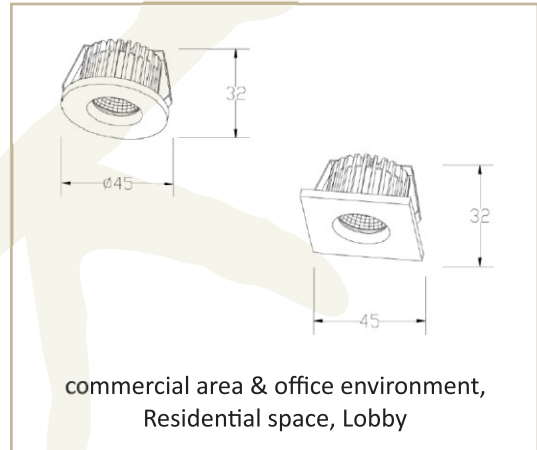

Product Name	Catalogue Reference No	Dimensions	Cut out size	Lamp wattage	Lumen output
TEENY	VAK-DL-TEE-RD/SQ-R-03	45x32	35	5W	210