

# TENSIL

It is a matter of always being able to create the right setting and brightness when and where you want

- Elegant, stylist, robust & efficient bollards
- Express safety, strength and harmony in urban lighting application
- Optic and heat dissipater protected to IP 66
- Choice of color temperatures
- Quality by Design to minimize your Total Cost of Ownership




**Housing:** Body is made up with pressure die cast aluminum. Base is made of galvanized die cast MS. Rubber gaskets are provided at appropriate location for dust and water protection

**Optical:** Diffuser is made of impact resistant PMMA/ PC specially designed for efficient light distribution. Choice of light color from 2700K-6500K. The exactitude optical system gives very low glare rating, while reducing light pollution.

**Electrical:** Fitting is wired for LEDs engine.

**Finishing:** Complete fitting is pure polyester based powder coated with high corrosion resistant and chemically chromotised protection. Also available with multiple coats of weather resistant polyurethane paint in various colors.

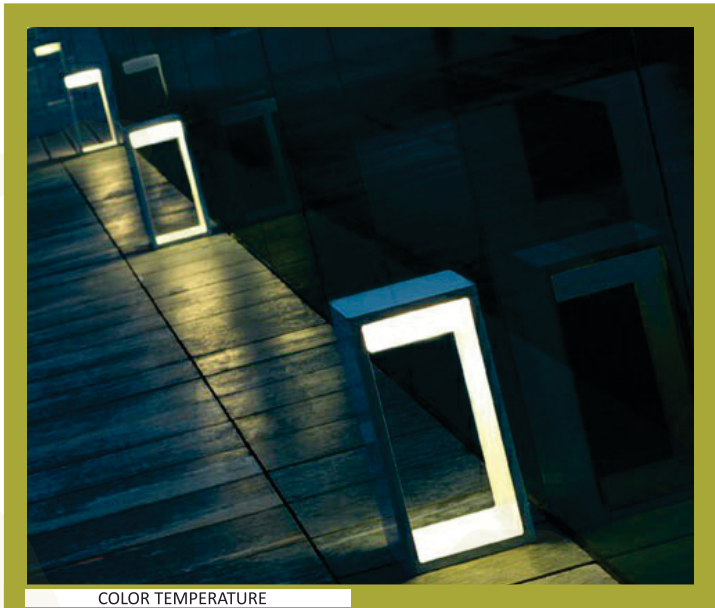

OUTDOOR LIGHTING

BOLLARD

COLOR TEMPERATURE

3000K    4000K    6500K

220V    IP66

595  
150    60

**Parks, Squares and pedestrian areas, Urban roads  
and streets, Bike paths, Precincts**

Product Name	Catlogue Reference No	Size (L)mm	LED Wattage	Ingress Protection
TENSIL	VAK-BL-TEN-S-06	595	06W	IP66